

2W solenoid valve (small size)

Home >> Products >> Directional control valve >> Water solenoid valve >> 2W solenoid valve (small size):




Product description:

Directional control valve product ----- 2W water solenoid valve is the most popular solenoid valve for water. It can work with 0 pressure. They are 2/2 valve, they used to control OPEN and CLOSE of the large flow. The size is from G1/8" to G2" .Working temperature is -10°C ~80°C.

Ordering Code

2W	025	- 08	- AC110V
Tow-position Solenoid Valve	Tow-way Aperture Flow Rate	of Joint Pipe Bore	Standrd Voltage
Tow-position Solenoid Valve(High-pressure Type)	025:2.5mm 040:4.0mm	06:G1/8 08:G1/4 10:G3/8	Dc12v Dc24v Ac24v 50Hz/60Hz Ac110v 50Hz/60Hz Ac220v 50Hz/60Hz Ac380v 50Hz/60Hz

Graphic symbol

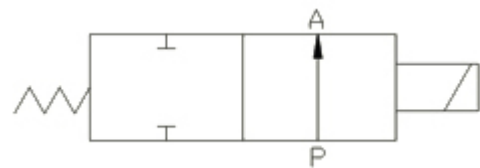


Specification

Model	2W025-06	2W025-08	2W040-10	2WH012-06	2WH012-08	2WH012-10
Aperture of Flow Rate	2.5		4	1.2		2
CV Value	0.23		0.6	0.05		0.15
Joint Pipe Bore	G1/8	G1/4	G3/8	G1/8	G1/4	G3/8
Motion Pattern	Direct Drive Type					
Working Medium	Air, Water, Oil					
Type	Normal Close Type					


Operation Fluid Viscosity	20CST Below
Working Pressure	2W:0~0.7 2WH:0~2
Max. Pressure Resistance	2W:1 2WH:3.5
Operating Temperature Range	--10~80°C
Voltage Range	±10%
Material of Body	Brass
Material of Oil Seal	XNBR

Overall Dimension



TYPE:2W025-06、08

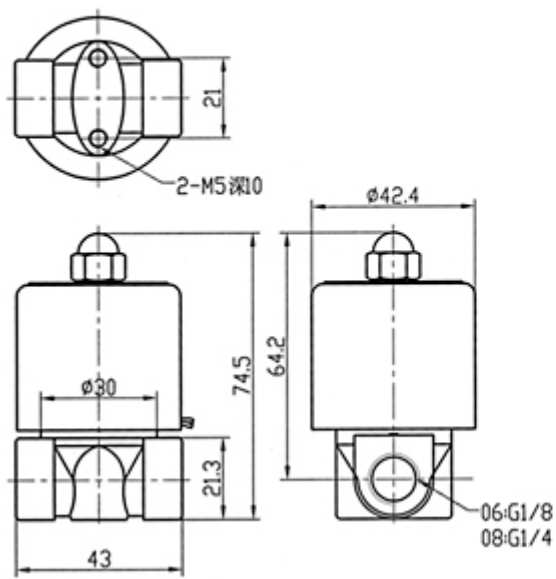

TYPE:2W040-10

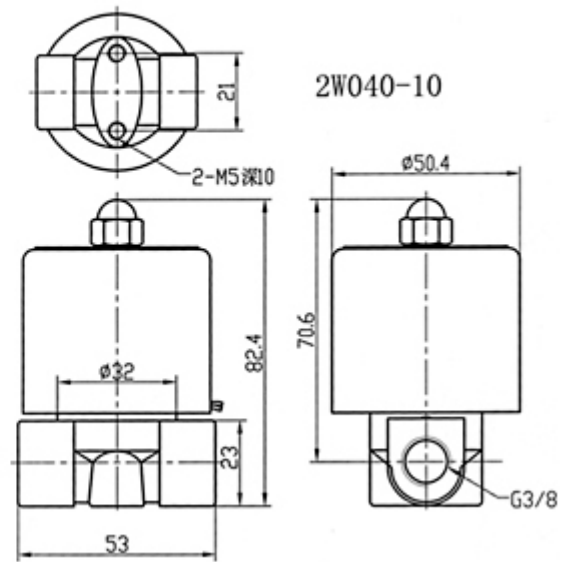

Flowing Character

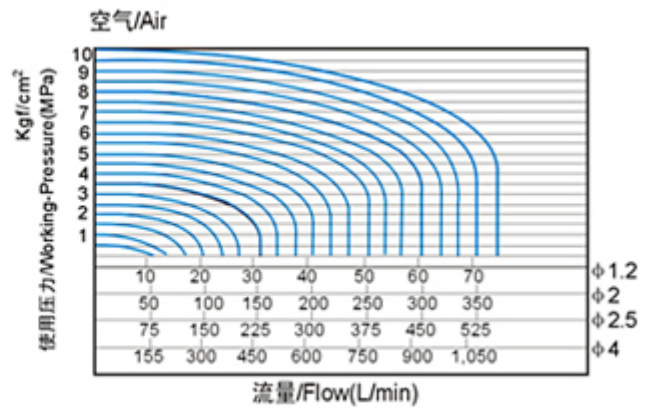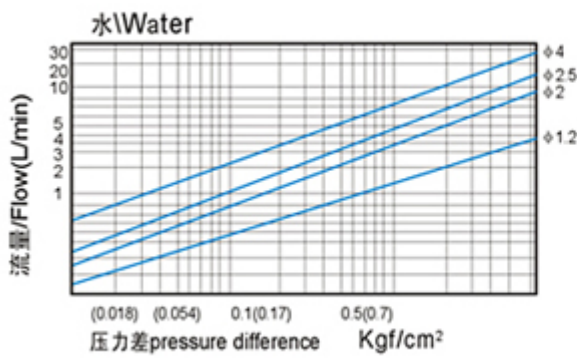

Company Information:

Company Name:

Ningbo Lida Pneumatic Kit Co.,Ltd.

Website:<http://www.cn-lida.com>

Address:

Eighth Quarter, Zhongxing East Road, Xikou, Fenghua, Zhejiang, China.

Post-code:315500

Contact Person:Lacey Liu exporting manager

Phone:

Telephone:0086-574-88846388

Fax:0086-574-88846288

Email:export@nblida.cn